


Cambridge Brass
P.O. Box 249
140 Orion Place
Cambridge, Ontario
Canada N1R 5V1
Tel: (519) 621-5520
Fax: (519) 621-8674
http://www.cambridgebrass.com

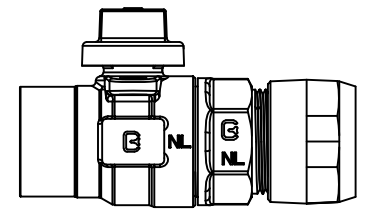


MODEL NO. 202NL

FEMALE IRON PIPE X CB COMPRESSION

STRAIGHT METER VALVE – NO LEAD
BALL STYLE FULL PORT

FOR THREADED PIPE X COPPER OR PLASTIC TUBING (CTS)

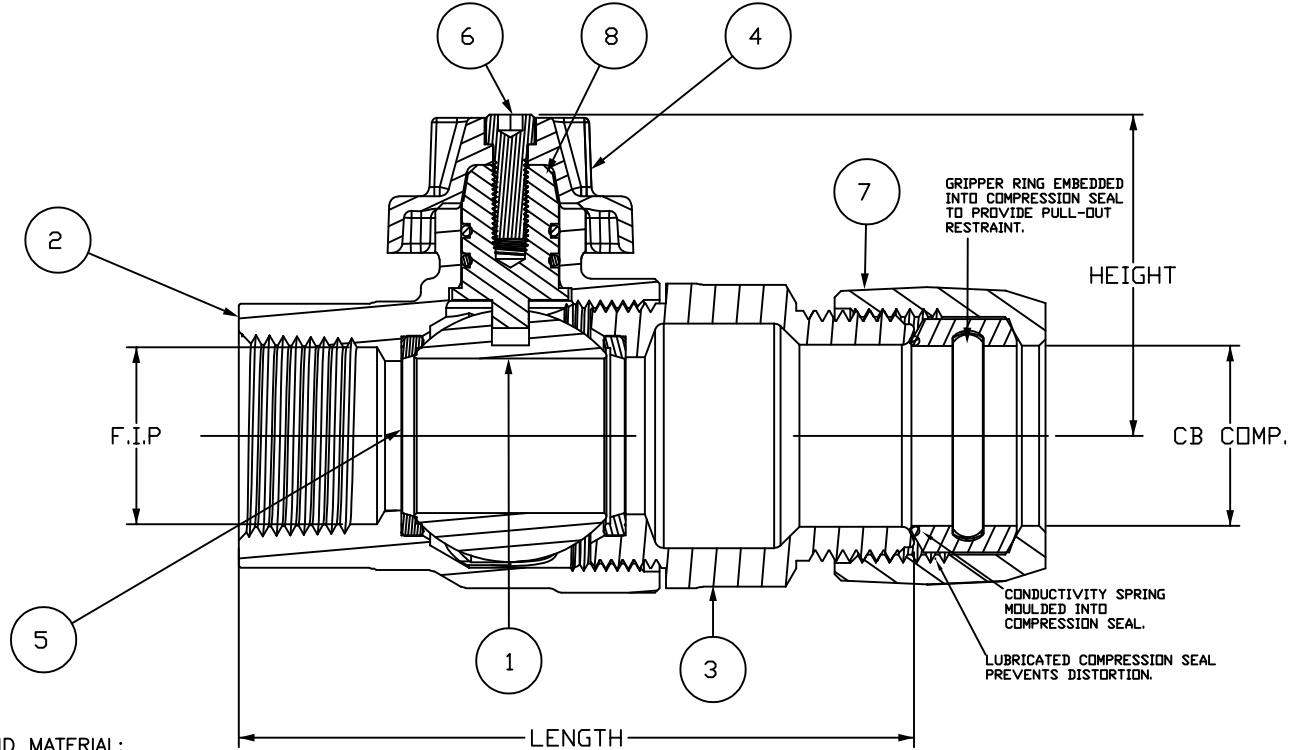

PARTS AND MATERIAL:

1. BALL: NO LEAD CAST BRASS, ALLOY C89833
2. BODY: NO LEAD CAST BRASS, ALLOY C89833
3. END BODY: NO LEAD CAST BRASS, ALLOY C89833
4. CAP: CAST BRASS, ALLOY C83600
5. SEATS: TEFLON
6. HEX SOCKET CAP SCREW: STAINLESS STEEL, TYPE 304
7. CB COMP NUT: CAST BRASS, ALLOY C83600
8. STEM: STAINLESS STEEL, TYPE 303

FEATURES:

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800 (ASTM B-62 AND ASTM B-584, UNS NO C83600-85-5-5-5).
- FLOW CAN BE IN EITHER DIRECTION.
- ROTATION STOPS RESISTS 200 FT-LB TORQUE.
- ENCAPSULATED LUGS UNDER CAP PROVIDE 90 DEGREE OPEN TO CLOSE OPERATION.
- BLOWOUT PROOF DESIGN.
- 300 PSI WORKING PRESSURE.
- HOLE FOR ATTACHING HANDLE IS PROVIDED IN CAP.
- PADLOCK WING FOR LOCKING VALVE IN CLOSED POSITION.
- CONFORMS TO AWWA C800 (ASTM B584 UNS C89833 FOR BRASS PARTS IN CONTACT WITH POTABLE WATER)
- CONFORMS TO ANSI/NSF 61-8
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380)
- BODY AND NUTS PROVIDE WRENCH FLATS FOR INSTALLATION

ORDERING INFORMATION:

FULL 360 ROTATION = ADD "R" TO END OF CATALOG NO.
HANDLE = ADD "H" TO END OF CATALOG NO.
TALL CAP = ADD "P" TO END OF CATALOG NO.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

VALVE SIZE	CATALOG NO.	F.I.P.	CB COMP.	LENGTH	HEIGHT	APPROX. WT. LBS.
3/4"	202NL-F3H3	3/4"	3/4"	3.10"	2.50"	2.1
1"	202NL-F4H4	1"	1"	3.67"	2.68"	3.1
1 1/4"	202NL-F5H5	1 1/4"	1 1/4"	4.84"	3.31"	8.2
1 1/2"	202NL-F6H6	1 1/2"	1 1/2"	5.59"	3.31"	7.8
2"	202NL-F7H7	2"	2"	5.86"	3.61"	10.7

Submitted by: