

## SUBMITTAL INFORMATION

Stainless Steel Four Piece Repair Clamp (1635 Series



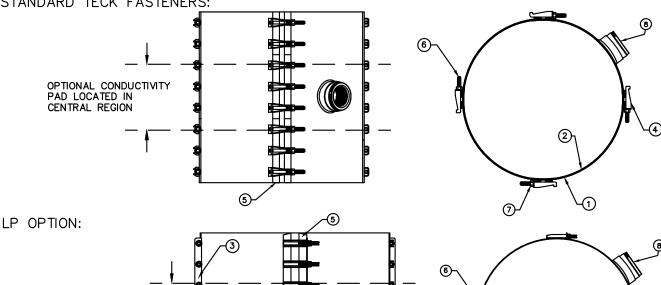

OPTIONAL CONDUCTIVITY PAD LOCATED IN CENTRAL REGION



## PARTS AND MATERIAL:

304 Stainless Steel 1. Band

Available widths 12", 16", 20", 24", 32" Available diameters 24" to 36", nominal sizes, custom sizes available NSF 61 Certified, NBR, Standard with flat gasket and finger joint 2. Gasket Also available with waffle/grid gasket with taper joint (T Option) 18-8 type 304 Stainless Steel (LP Option)

3. Lifter Plate

4. Finger Bracket 18-8 type 304 Stainless Steel 5. Side Bar

6. Studs

7. Nut

8. Stainless Tap

18—8 type 304 Stainless Steel
18—8 type 304 Stainless Steel
Stainless Steel, 5/8" roll NC thread
5/8—11 Stainless Steel heavy hex nuts coated to prevent galling
304 Stainless Steel, welded SS outlet
Outlet Sizes: 3/4" to 2" AWWA (CC), NPT (FIP) or BSPT
Standard TECK Fastening System, complete with flat gasket with finger joint
T — Option with waffle arid gasket 9. Options:

T — Option with waffle/grid gasket
LP — Option with lifter plate
C — Option with conductivity pad (central location, secured to gasket)
BW — Option, Belleville Washers for HDPE pipe

## FEATURES:

- All components are made of SS304 type Stainless Steel to prevent corrosion
- Fully Passivated for corrosion resistance
- 1.6" pipe diameter range coverage
- Clamp size, laser etched on each repair clamp
- Made to standard pipe sizes, custom sizes available upon request
- Recommended bolt torque 60 ft. lbs.
- Repair clamps rated to 150 PSI.
- Economical means of repairing pin hole leaks, punctures, and splits in pipe
- Nuts shall be fluoropolymer coated to prevent galling Available with TECK fingers, for ease installation without removing nuts, or lifter plate design.
- Available with either flat gasket with finger joint or grid gasket with taper joint.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass P.O. Box 249, 140 Orion Place Cambridge, Ontario Canada N1R 5V1

Tel: (519) 621-5520

Fax: (519) 621-8674 http://www.cambridgebrass.com



FILE: SUBMITTAL/425\_SUBMITTAL.DWG REV. C — MDR, APR 2021

SUBMITTED BY: