

## SUBMITTAL INFORMATION

METER SETTER 6020NL-4\_\_D4D4-VQN



1" REDUCED PORT METER BALL VALVE INLET AND DUAL CARTRIDGE CHECK VALVE OUTLET

INLET AND OUTLET CONNECTIONS TO WATER SERVICE DUAL PURPOSE

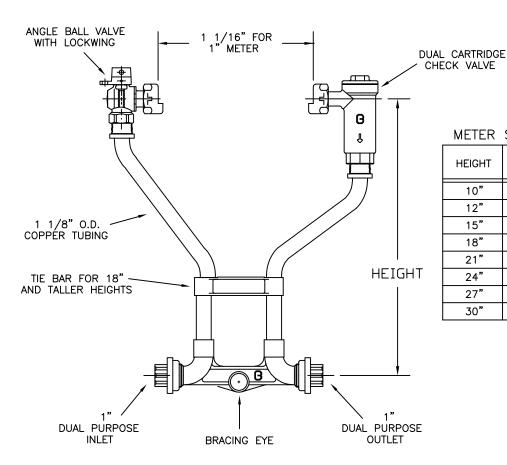

## METER SETTER CATALOG NUMBERS

HEIGHT	CATALOG NUMBER	APRROX. WT. LBS.
10"	6020NL-410D4D4-VQN	
12"	6020NL-412D4D4-VQN	
15"	6020NL-415D4D4-VQN	
18"	6020NL-418D4D4-VQN	
21"	6020NL-421D4D4-VQN	
24"	6020NL-424D4D4-VQN	
27"	6020NL-427D4D4-VQN	
30 <b>"</b>	6020NL-430D4D4-VQN	

## **FEATURES**

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800.

- (ASTM B-62 AND B-584, UNS NO C83600-85-5-5).

  SADDLE NUTS HOLD THE METER IN PLACE FOR TIGHTENING.

  TIE BAR IS STANDARD FOR 18" AND TALLER METER SETTER HEIGHTS. - 1 1/8" O.D. COPPER RISERS PROVIDE MORE FLOW CAPACITY.
- ASSÉMBLED WITH LEAD-FREE SOLDER.
- BRACING EYE IS STANDARD.
- CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C1200 MANUFACTURED TO ASTM B88.
   POSITIONS THE METER DIRECTLY ABOVE THE CENTERLINE OF THE SERVICE.
- FURNISED WITH RUBBER METER GASKETS.
- ANGLE VALVE HAS PADLOCK WINGS FOR LOCKING VALVE IN CLOSED POSITION.
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380)
- 300 PSI WORKING PRESSURE

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass P.O. Box 249, 140 Orion Place Cambridge, Ontario Canada N1R 5V1 Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com



SUBMITTED BY: