


SUBMITTAL INFORMATION


METER SETTER 6020NL-7__F7F7-UQB5



NO LEAD ANGLE BALL VALVE X DUAL CHECK VALVE (AT 2" METER)

FEMALE IRON PIPE THREAD INLET AND OUTLET

WITH 1 1/4" BYPASS

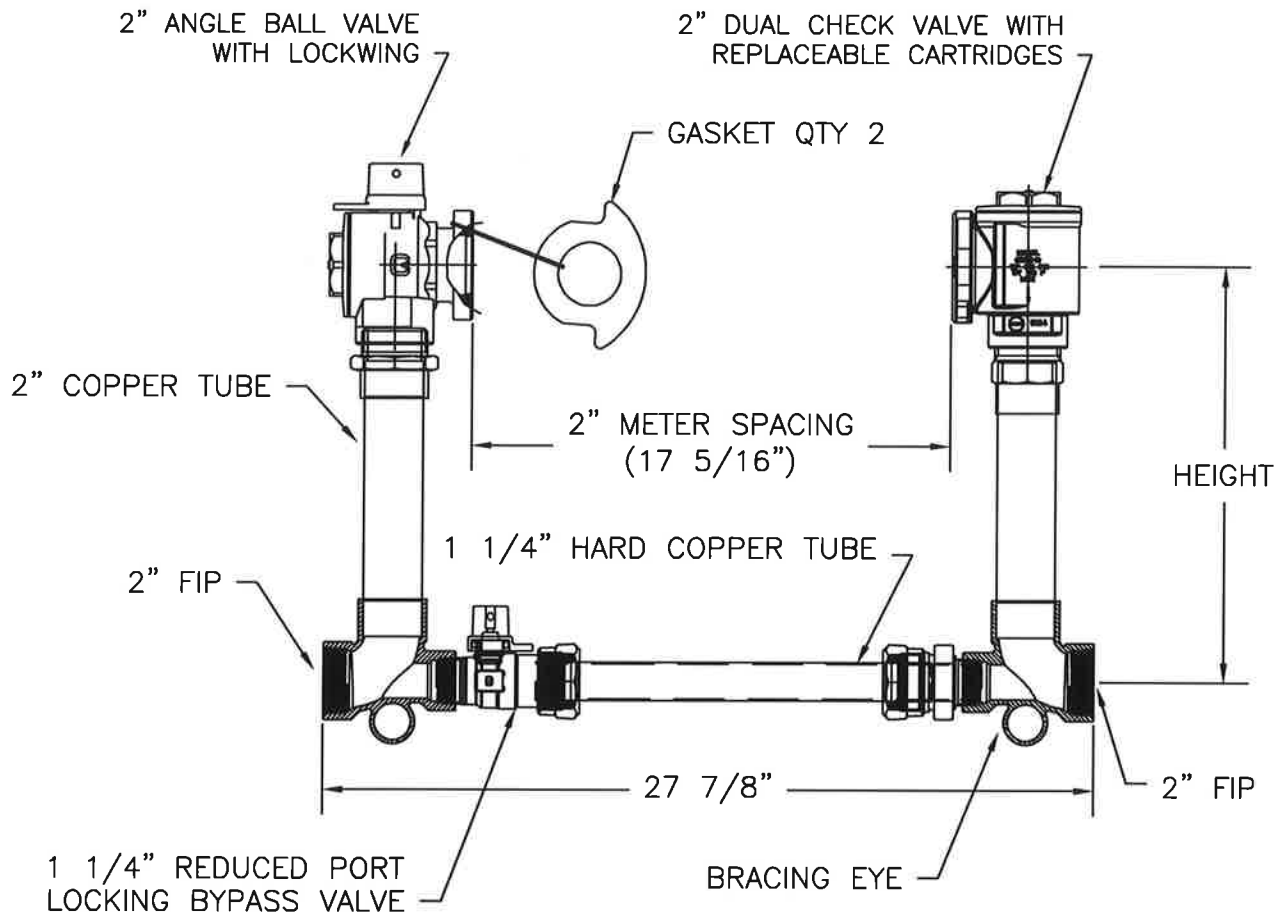

FEATURES:

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800 (ASTM B-584, UNS NO C89833).
- CONFORMS TO ANSI/NSF 61-8
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act, PL 111-380)
- BRACING EYES ARE STANDARD
- ASSEMBLED WITH LEAD-FREE SOLDER
- CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C12000 MANUFACTURED TO ASTM B88.
- EPDM METER GASKETS PROVIDED (NSF APPROVED).
- ANGLE VALVES HAVE PADLOCK WINGS FOR LOCKING VALVES IN CLOSED POSITION.
- 300 PSI WORKING PRESSURE.

HEIGHT	CATALOG NUMBER	APPROX. WT. LBS.
9'	6020NL-709F7F7-UQB5	
12'	6020NL-712F7F7-UQB5	
15'	6020NL-715F7F7-UQB5	
18'		
21'		
24'		
27'		

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass
P.O. Box 249, 140 Orion Place
Cambridge, Ontario
Canada N1R 5V1
Tel: (519) 621-5520
Fax: (519) 621-8674
<http://www.cambridgebrass.com>

CAMBRIDGE
BRASS

REV. A - MARCH 2023

SUBMITTED BY: