


# SUBMITTAL INFORMATION

HORIZONTAL  
SETTER


6020NL-7\_\_F7F7-UQB



ANGLE BALL VALVE BY ANGLE CHECK VALVE AT 2" METER

FEMALE IRON PIPE THREAD INLET AND OUTLET

WITH 1" BYPASS

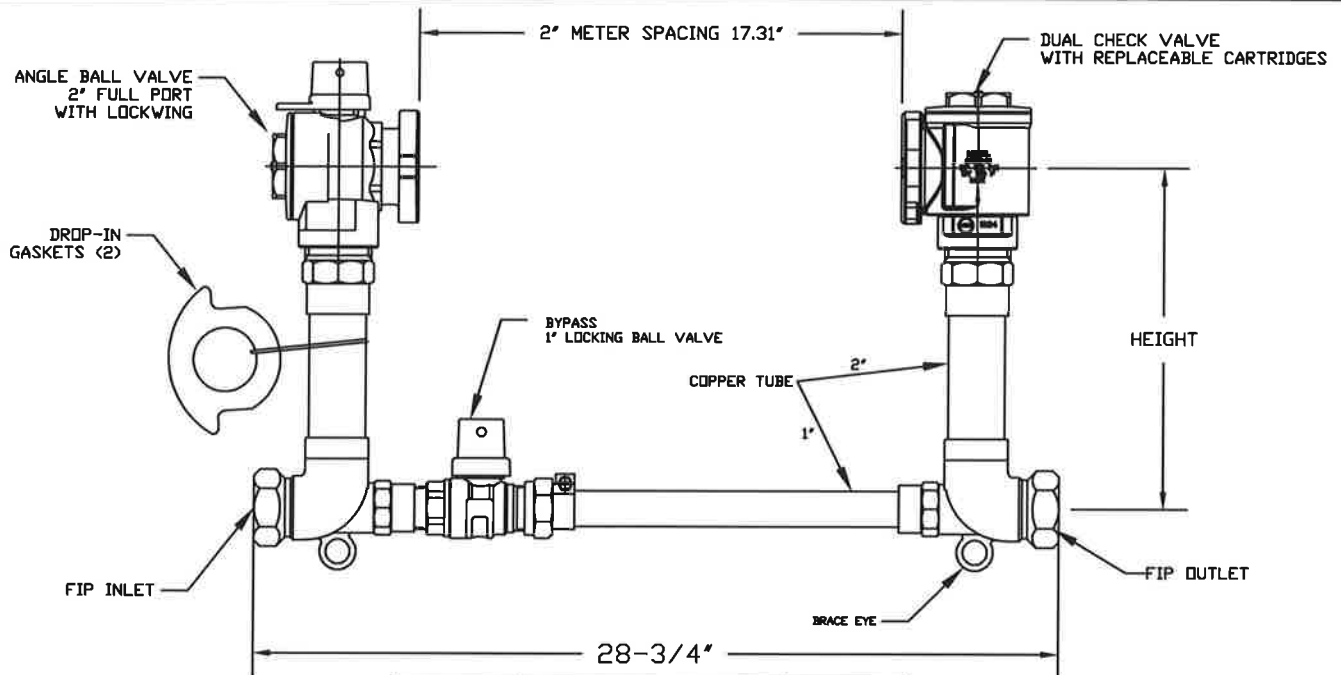

HEIGHT	CATALOG NUMBER	APPROX. WT. LBS.
12"	6020NL-712F7F7-UQB	
15"	6020NL-715F7F7-UQB	
18"	6020NL-718F7F7-UQB	
21"	6020NL-721F7F7-UQB	
24"	6020NL-724F7F7-UQB	
27"	6020NL-727F7F7-UQB	

**FEATURES:**

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800 (ASTM B-584, UNS NO C89833 FOR BRASS PARTS IN CONTACT WITH POTABLE WATER, ASTM B-62 AND ASTM B-584, UNS NO C83600 FOR ALL OTHER BRASS PARTS).
- CONFORMS TO ANSI/NSF 61-8.
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380).
- ASSEMBLED WITH LEAD-FREE SOLDER.
- BRACING EYE IS STANDARD.
- POSITIONS THE METER DIRECTLY ABOVE THE CENTERLINE OF THE SERVICE.
- FURNISHED WITH TWO RUBBER GASKETS FOR METER NUTS/IDLER.
- CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C1200 MANUFACTURED TO ASTM B88.
- ANGLE VALVE HAS PADLOCK WINGS FOR LOCKING VALVE IN CLOSED POSITION.
- FACTORY TESTED AT 90 PSI AIR PRESSURE UNDER WATER.
- 175 PSI WORKING PRESSURE.
- 180°F MAXIMUM CONSTANT TEMPERATURE.
- CHECK VALVE IS ASSE 1024 APPROVED.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass  
P.O. Box 249, 140 Orion Place  
Cambridge, Ontario  
Canada N1R 5V1  
Tel: (519) 621-5520  
Fax: (519) 621-8674  
<http://www.cambridgebrass.com>



SUBMITTED BY: