
Cambridge Brass P.O. Box 249 140 Orion Place Cambridge, Ontario
Canada N1R 5V1
Tel: (519) 621-5520
Fax: (519) 621-8674
http://www.cambridgebrass.com






MODEL NO. 105NL

CAMPAK PVC X CAMPAK PVC

FIL COUPLING

FOR PVC PLASTIC TUBING

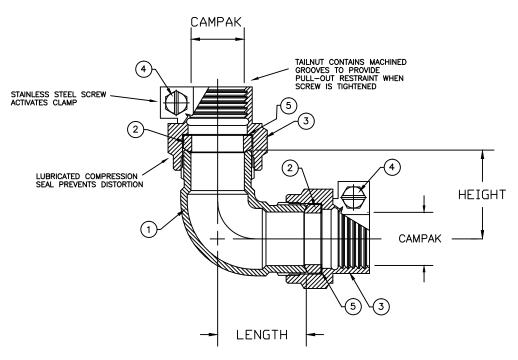

- PARTS AND MATERIAL:
 1. ELBOW BODY: NO LEAD CAST BRASS, ALLOY C89833
 2. COMPRESSION SEAL: NITRILE RUBBER
 3. CAMPAK NUT: CAST BRASS, ALLOY C83600
 4. SCREW: STAINLESS STEEL, ALLOY 304

FEATURES:

- ALL COMPONENTS CONFORM TO AWWA C800

 (ASTM B-584 UNS NO C89833 FOR BRASS PARTS IN CONTACT WITH POTABLE WATER,
 AND ASTM B-62 AND B-584 UNS NO C83600 FOR ALL OTHER BRASS PARTS).

 CSA CLASSIFIED TO ANSI/NSF STANDARD 61-8.

 CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water
- Act. PL 111-380)
- BODY PROVIDES LARGE, RUGGED WRENCH FLATS FOR PROPER INSTALLATION.
 YOKE ELL COUPLINGS MAY BE USED ON EITHER END OF THE YOKE.
 300 PSI WORKING PRESSURE

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

ELL COUPLING SIZE	CATALOG NO.	CAMPAK PVC BOTH ENDS	LENGTH	HEIGHT	APRROX. WT. LBS.
3/4"	105NL-PJ3PJ3	3/4"	1.97"	1.97"	
1"	105NL-PJ4PJ4	1"	2.50"	2.50"	

Submitted by: