
Cambridge Brass P.D. Box 249 140 Orion Place Cambridge, Ontario Canada N1R 5V1 Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com






MODEL NO. 252NL

COPPER FLARE x COPPER FLARE

CURB STOP - BALL STYLE OPEN RIGHT

## FOR COPPER TUBES

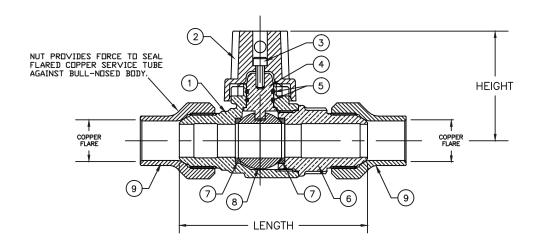

## PARTS AND MATERIAL:

- 1. VALVE BODY: CAST BRASS, ALLOY C89833
- 2. CAP: CAST BRASS, ALLOY C83600
  3. CAP SCREW: STAINLESS STEEL, TYPE 304
  4. STEM: STAINLESS STEEL, TYPE 303
  5. O-RING: NITRILE RUBBER

- 6. ENDBODY: CAST BRASS, ALLOY C89833

- 7. SEATS: TEFLON
  8. BALL: CAST BRASS, ALLOY C89833
  9. COPPER FLARE NUT: CAST BRASS, ALLOY C83600

## **FEATURES:**

- FEATURES:

   MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800-05
  (ASTM B-584, UNS NO C89833).

   CONFORMS TO ANSI/NSF 61-8

   CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380)

   FLOW CAN BE IN EITHER DIRECTION.

   ROTATION STOPS RESISTS 200 FT-LB TORQUE.

   ENCAPSULATED LUGS UNDER CAP PROVIDE 90 DEGREE OPEN TO CLOSE OPERATION.

   HOLE FOR ATTACHING CURB BOX ROD OR HANDLE IS PROVIDED IN CAP.

   BLOWOUT PROOF DESIGN.

   300 PSI WORKING PRESSURE.

## ORDERING INFORMATION: HANDLE = ADD "H" TO END OF CATALOG NO.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

VALVE SIZE	CATALOG NO.	COPPER FLARE	COPPER FLARE	LENGTH	HEIGHT	APPROX. WT. LBS.
3/4"	252NL-C3C3	3/4"	3/4"	4.29"	2.50"	2.7
1"	252NL-C4C4	1"	1"	4.80"	2.68"	4.0
1 1/2"	252NL-C6C6	1 1/2"	1 1/2"	7.56"	3.84"	11.9
2"	252NL-C7C7	2"	2"	8.16"	4.14"	16.6

Submitted by:

FILE: SUBMITTAL/252NL-CC.DWG MD, MAY 2014